



Vision 50

High traffic applications

R
REYNAERS
aluminium




Vision 50 is a range of non-thermally insulated profiles, designed specifically for ground-floor treatments. The system has been designed to offer the highest level of performance whilst being efficient in manufacture. Vision 50 ground floor treatments are designed for high traffic applications in both office and retail developments and can offer a threshold detail that conforms to UK building regulations.

The glass panels can be placed both on the outside and on the inside, with a flush appearance. Swing doors can easily be integrated into the façade. To aid safety, all doors can be fitted with an integrated anti-finger trap.


A simple butt jointed framing construction allows maximum flexibility. The system can be designed with single and double swing doors or doors can be restricted to just open to one side via a hinged and rebate construction. Various devices can be fitted allowing the door to pivot or slide automatically.

TECHNICAL CHARACTERISTICS

Style variants		STANDARD DOOR	PIVOT DOOR	AUTOMATIC DOOR
Min. visible width	Frame + Vent	149 mm	175 mm	125 mm
Overall system depth	Frame	100 mm	100 mm	150 mm
	Vent	50 mm	50 mm	50 mm
Glass thickness		max. 37 mm		
Beaded sections		4 to 37 mm		
Pocket sections		4 to 24 mm		
Glazing method		Beaded door vent or in case of screens a shuffled pocket frame		

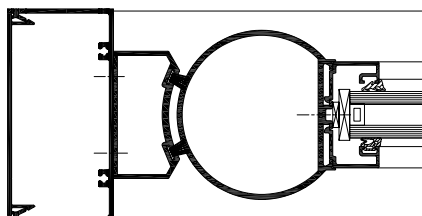

ANTI-FINGER TRAP

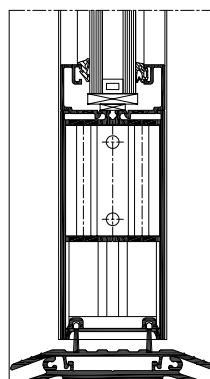

FLAT BOTTOM SOLUTION



REYNAERS ALUMINIUM NV/SA • www.reynaers.com • info@reynaers.com

07/2012 - 0H0.13C2.00 - Publisher Responsible at Law: E. Fonteyne, Oude Liersebaan 266, B-2570 Duffel

